


# Bär Cargolift – Features & benefits

Because we are prepared for Canadian requirements!

24 months  
warranty on parts  
and labour




Well protected against the weather by covered cylinders and **cathodic dip** and **powder coated steel parts**.

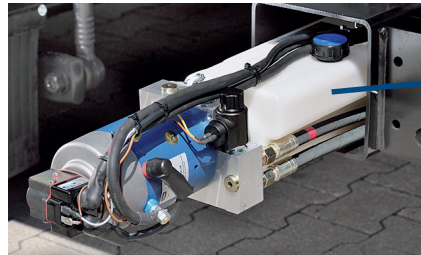


**Safe protection** for power pack and control unit in the beam.




For temperatures up to -45° celcius and for the climate: **Biodegradable Syntofluid oil**.

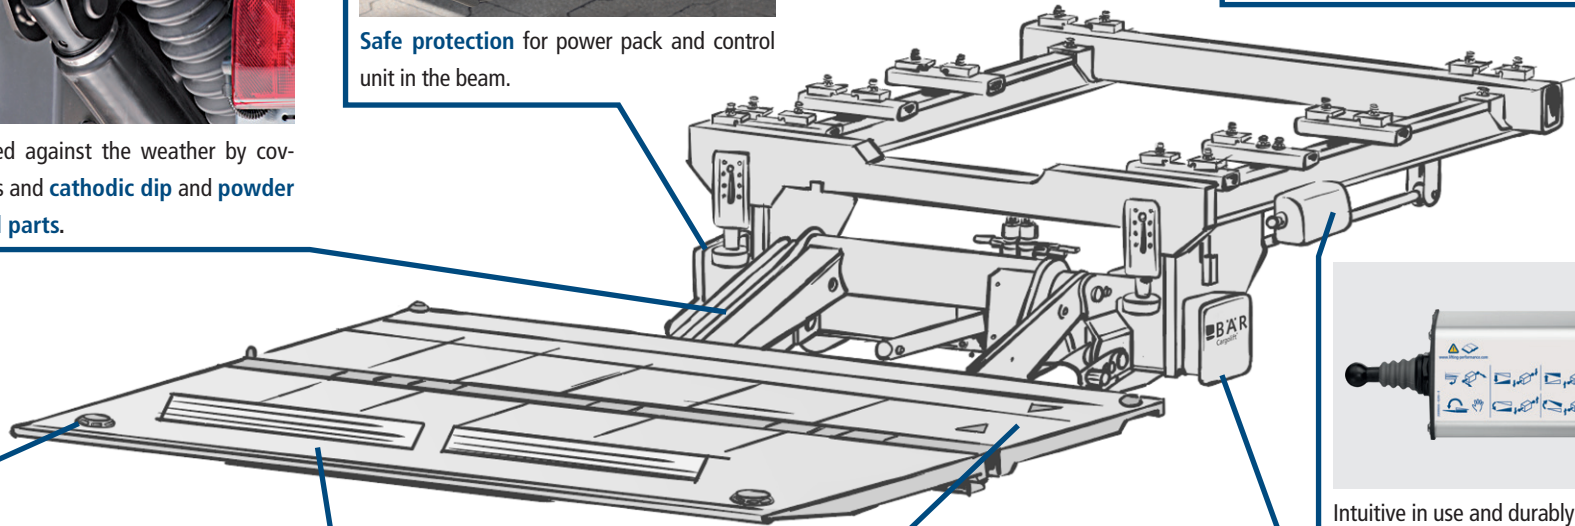


Intuitive in use and durably constructed: **Bär Control EVO** (water resitant IP67).

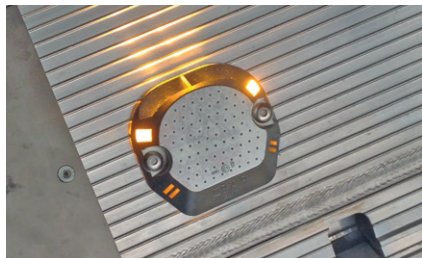

Alerting the surrounding in a reliable way: LED flashing light **CargoFlash**.

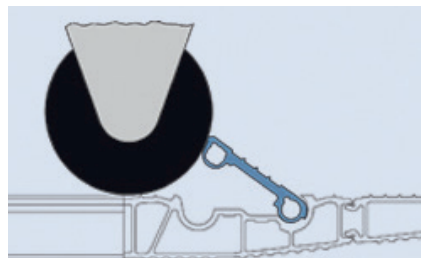

Trolley card stop for save transport of two trolleys.

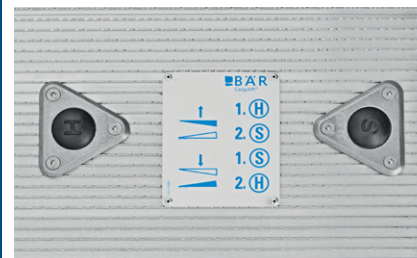

Simple operation on the platform by the two **button foot control**.



For a better protection the robust cover for beam can be **padlocked**.

# Bär Cargolift Slider – Two fold retractable

## BC 2000 R42 – Simple, flexible, robust



The Cargolift for complex logistics tasks: BC 2000 R42. With the double-folded platform, this Cargolift disappears compactly under the carrier vehicle in driving position. After a motor slides the platform out and it is manually unfolded, the platform is quickly ready for use. The truck can then be used alternatingly in distribution and long-distance transport as desired.

Carrier vehicle	GVW/t min.	GVW/t max
Truck	264556 lbs (12 t)	55116 lbs (25 t)
Trailer	264556 lbs (12 t)	39683 lbs (18 t)

Load capacity	Load centre	Load moment
2000 kg (4409 lbs)	39,37" (1000 mm)	177014 lb-in (20,0 kNm)

### Aluminium platform

Platform system	Height	Width
PBret	79,13" (2010 mm)	94,49" (2400 mm)

### Weight with platform width 94,49" (2400 mm)


Platform height	Weight
79,13" (2010 mm)	1396 lbs (633 kg)

The weight includes the standard scope of supply with mounting material, cables and under run bar.


### Equipment



Bär Control EVO is intuitive in use, durably constructed and can be easily operated with gloves thanks to the vertically and horizontally operating joysticks.

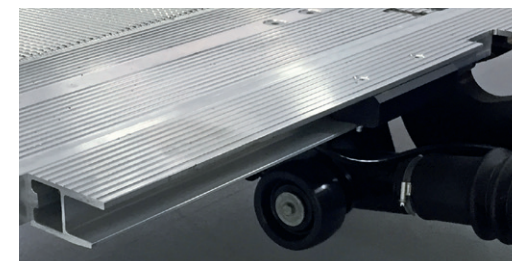

Aluminium bridge plate.

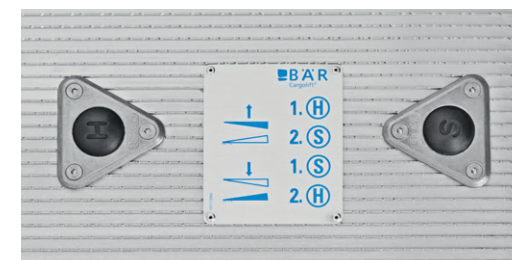

Bär **foot control** offers simple operation by means of two foot switches in addition to a safe location.

Patented.