


# Bär Cargolift – Features & benefits

Because we are prepared for Canadian requirements!

24 months  
warranty on parts  
and labour




Well protected against the weather by covered cylinders and **cathodic dip** and **powder coated steel parts**.

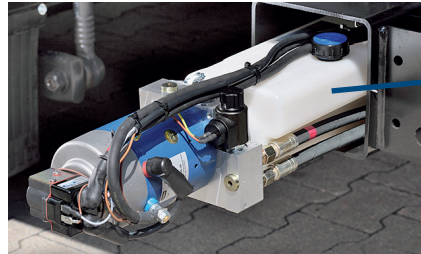


**Safe protection** for power pack and control unit in the beam.




For temperatures up to -45° celcius and for the climate: **Biodegradable Syntofluid oil**.

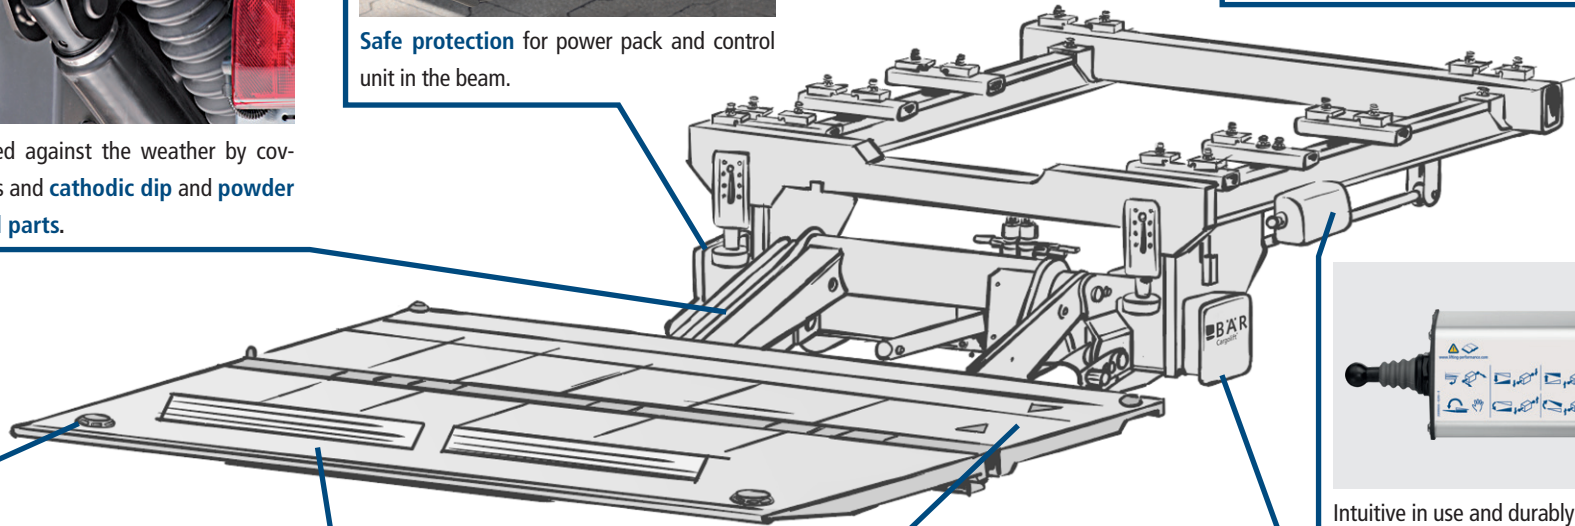


Intuitive in use and durably constructed: **Bär Control EVO** (water resitant IP67).

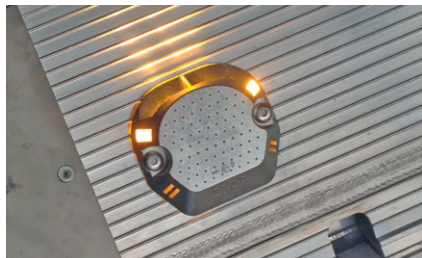

Alerting the surrounding in a reliable way: LED flashing light **CargoFlash**.

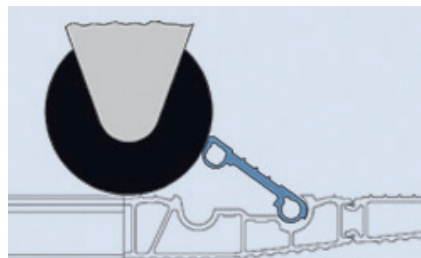

Trolley card stop for save transport of two trolleys.

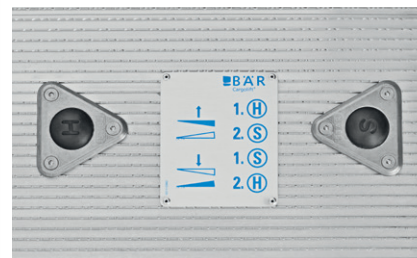

Simple operation on the platform by the two **button foot control**.



For a better protection the robust cover for beam can be **padlocked**.

# Bär Cargolift Slider – Retractable

## BC 2500 R41 – Even more power for the highest demands



Transport carriers expect high performance and the BC 2500 R41 does just that. This Cargolift offers the best versatility due to a load capacity of 5512 lbs (2500 kg) and a 39.37" (1000 mm) load center along with a platform length of up to 79.13" (2010 mm). With the extensive use of aluminium, this retractable Cargolift offers an optimal weight to load bearing capacity ratio. In the process, there is also a sufficient remaining payload for heavy pallets.

Carrier vehicle	GVW/t max.
Truck	55116 lbs (25,0 t)

Load capacity	Load centre	Load moment
2500 kg (5512 lbs)	39,37" (1000 mm)	221269 lb-in (25,0 kNm)

### Aluminium platform

Platform system	Height	Width
BAret45VL	71,26" / 79,13" (1810 / 2010 mm)	94,49" (2400 mm)

### Weight with platform width 94,49" (2400 mm)


Platform height	Weight
71,26" (1810 mm)	1433 lbs (650 kg)
79,13" (2010 mm)	1444 lbs (655 kg)

The weight includes the standard scope of supply with mounting material, cables and under run bar.

### Equipment



**BAret45VL** platform system with fixed and folding part in natural aluminium. Manual folding of platform tip with **spring assistance**.

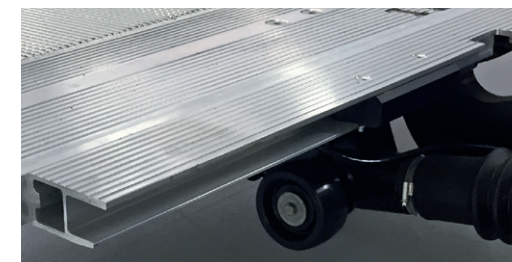

**Aluminium bridge plate.**



**Bär Control EVO** is intuitive in use, durably constructed and can be easily operated with gloves thanks to the vertically and horizontally operating joysticks.

Patented.